
STEP BY STEP INSTRUCTIONS





Apply adhesive according to manufacturer's instructions. Vitrex LASHXL Tile Levelling System is recommended when using at least a 6mm x 6mm trowel depending on tile size to apply the adhesive. Slide two clips under the tile approx. 50mm from each end of the tile.

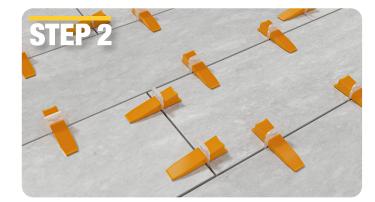

Position the tiles, aligning the sides and pushing them tightly against the clip. Slide a reusable wedge into each clip and tighten until tiles are snug against the bottom of the wedge.

Lash Pliers also available.



Let the adhesive dry as required by manufacturer's instructions. Simply kick the side of clips in the direction of the grout joints to snap them off or use a non-marking, rubber mallet. Keep reusable wedges for your next project.



Be sure to follow all substrate preparation procedures as directed by the adhesive manufacturer before starting installation. Back buttering/applying adhesive directly to tile back is always recommended for larger format tiles. The Vitrex LASHXL Tile Levelling System should not be used as a substitute for any levelling or substrate preparation products.

QEP Co. UK Ltd., The Maltsters, Wetmore Road, Burton upon Trent, DE14 1LS - Tel: +44 (0) 1283 245 430 - www.vitrex.co.uk



