

SPEC SHEET



TILE LEVELLING SYSTEM

2 Part System - 1 Bases and 2 Caps

The Tile Levelling System was developed out of a need to diminish costly mistakes due to unlevelled tiles causing lippage in high end installations. It is the perfect system to use with tile plank and large format rectified porcelain, marble and stone and the flat bed design is ideal for wall tile installations. This time saving system adjusts the height of the tiles and evenly holds their edges throughout the setting process. It is the most cost effective installation method on the market to eliminate lippage.

LASH[®] SPIN

LEVEL ALIGN SPACE HOLD

LEVEL & ALIGN

Automatically aligns the tiles, ensuring tile surface is level

SPACE


Evenly spaces tiles to prevent joint variation

HOLD

Caps hold tiles at even height until the adhesive sets

ELIMINATES UNEVEN TILES - NO MORE LIPPAGE

1 BASES

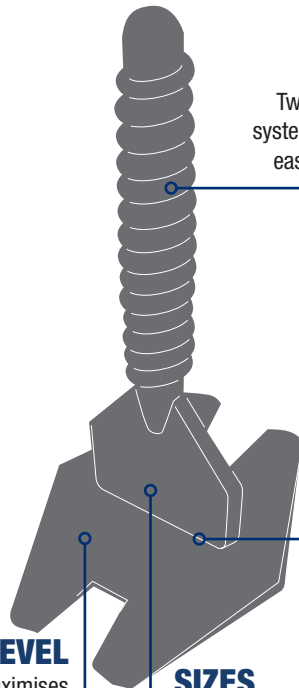

DESIGN
Twisting screw system allows for easy tightening

EASY BREAK
Simply strike with a hammer once the adhesive has cured to snap off


LEVEL
Flat base maximises adhesive coverage and ensures tile surface is lippage free

SIZES
Two sizes are available:
2mm and 3mm grout lines

ALIGN

Fins and ridges on the cap allows for a strong grip for tightening

2 CAPS

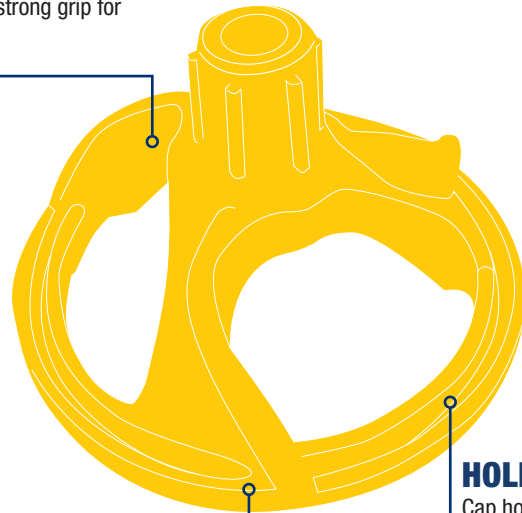

COST EFFECTIVE
Reusable cap

HOLD
Cap holds tiles securely while tile adhesive dries


FOR MORE INFORMATION
SCAN THE QR CODE



SPEC SHEET



EASY TO INSTALL AND REMOVE

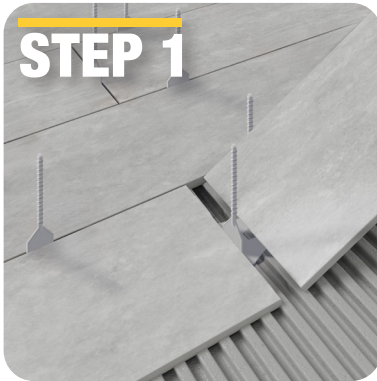


STEP 1
Apply adhesive/mortar according to manufacturer's instructions. Place the spacer base under the edge of the tile/paver with no mortar between them.



STEP 2

Install the next tile against the spacers already placed to prevent movement. Use a rubber mallet to bed the tile into the mortar while releasing air trapped underneath.

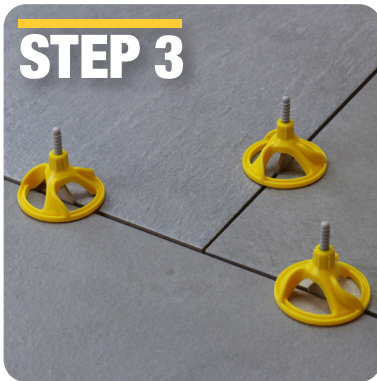

STEP 3

Place a LASH SPIN cap on the top of the base piece and rotate until the cap reaches the tile. Continue turning all caps until all tile surfaces are flush.



STEP 4

After the adhesive/mortar is cured, the caps and posts can be removed by using striking with a mallet or kicking. The area is now ready for grouting.

PRODUCTS

Type	Part Number	Quantity
1 and 2	LASHSK2	150 Bases and 50 Caps - 2mm Grout Line
1 and 2	LASHSK3	150 Bases and 50 Caps - 3mm Grout Line
1	LSB2250	250 Bases - 2mm Grout Line
1	LSB3250	250 Bases - 3mm Grout Line
2	LSC100	100 Caps

PROTECTIVE PLATES

Provides an effective protective barrier between the LASH and the surface of the tile, preventing damage to both items. It is recommended when working with especially rough tiles and paving slabs to prevent damage to the Cap during tightening. The plate evenly distributes the pressure from the Cap chipping the edges of tiles. The plate also prevents scratches to the tile that can be caused by twisting the Cap. Make sure the plates are clean before use.

Part Number	Quantity
PP050	Protective Plates

